## (19) World Intellectual Property Organization International Bureau

# 

(43) International Publication Date 27 January 2005 (27.01.2005)

**PCT** 

(10) International Publication Number WO 2005/008843 A3

(51) International Patent Classification7:

H01R 9/24

(21) International Application Number:

PCT/JP2004/010370

(22) International Filing Date: 14 July 2004 (14.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

17 July 2003 (17.07.2003) 2003-198220


- (71) Applicant (for all designated States except US): YAZAKI CORPORATION [JP/JP]; 4-28, Mita 1-chome, Minato-ku, Tokyo 108-8333 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CHIBA, Shingo [JP/JP]; c/o Yazaki Parts Co., Ltd.,, 206-1, Nunobikibara, Haibaracho,, Haibara-gun, Shizuoka 421-0407 (JP). MAT-SUSHITA, Haruyuki [JP/JP]; c/o Yazaki Syscomplus Co., Ltd., 206-1, Nunobikibara, Haibaracho,, Haibara-gun, Shizuoka 421-0407 (JP).

- (74) Agents: TAKINO, Hideo et al.; 4th Floor, Hiroo SK bldg., 36-13, Ebisu 2-chome, Shibuya-ku, Tokyo 150-0013 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

### Published:

with international search report

[Continued on next page]

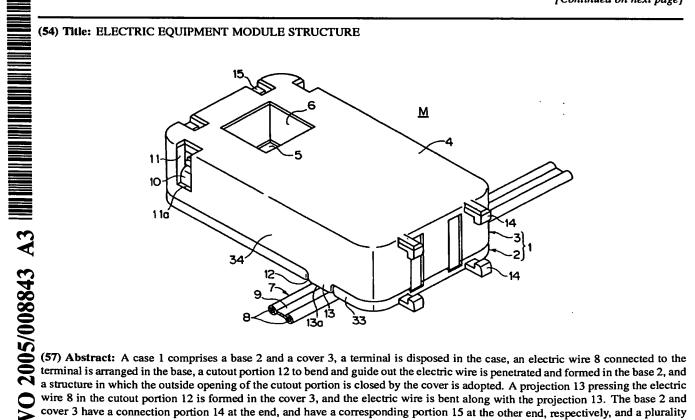

wire 8 in the cutout portion 12 is formed in the cover 3, and the electric wire is bent along with the projection 13. The base 2 and cover 3 have a connection portion 14 at the end, and have a corresponding portion 15 at the other end, respectively, and a plurality of cases 1 can be connected mutually. The connection portion 14 biases the base 2 and cover 3 in the closing direction.

#### WO 2005/008843 A3

before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

31 March 2005